



# R: Higher-order functions and their types

Sławek Staworko

University of Lille

2020

# Outline

What is functional programming?

Functions in R

Use case: Map/Reduce

Type systems

How to type functions?



# What is functional programming?

## Functional programming

A style of writing programs that views computation as an evaluation of an expression with functions (mathematical)

- ▶ **side-effect free** – no change in the state of the environment, function returns the same result for the same arguments
- ▶ **immutable data structure** – once created cannot be modified (but a modified “copy” can be created)
- ▶ **function are first-class citizens** – functions can be arguments of other functions and can be returned as results

Typically, FP has extensive support for list processing

```
quicksort [] = []
quicksort (x:xs) = quicksort small ++ [x] ++ quicksort large
  where small = [y | y <- xs, y <= x]
        large = [y | y <- xs, y > x]
```

# R as a functional programming language

## R is not purely functional

R combines elements of declarative and imperative programming

- ▶ functions are first-class citizens
- ▶ data is immutable but functions may have side-effects

## Declarative programming

The output of a program is specified using expressions that specify  
**what** the output should be

- + Less programming errors
- + No concurrency issues (multi-processor environments)

## Imperative programming

The output of program is specified using instructions that specify  
**how** the output should be calculated

- + Efficient code is easier to write



# Functions in R

# What is a function?

## Function

is an object that takes an object and returns another object.

# What is a function?

## Function

is an object that takes an object and returns another object.

## Example

- ▶ `sqrt(2.0) ↪ 1.414214...`

# What is a function?

## Function

is an object that takes an object and returns another object.

## Example

- ▶ `sqrt(2.0) ↪ 1.414214...`
- ▶ `substr("John Smith",6,10) ↪ "Smith"`

# What is a function?

## Function

is an object that takes an object and returns another object.

## Example

- ▶ `sqrt(2.0)`  $\mapsto$  1.414214...
- ▶ `substr("John Smith", 6, 10)`  $\mapsto$  "Smith"
- ▶ `sort(<1,3,1,2>)`  $\mapsto$  <1,1,2,3>

# What is a function?

## Function

is an object that takes an object and returns another object.

## Example

- ▶ `sqrt(2.0)`  $\mapsto$  1.414214...
- ▶ `substr("John Smith", 6, 10)`  $\mapsto$  "Smith"
- ▶ `sort(<1,3,1,2>)`  $\mapsto$  <1,1,2,3>
- ▶ `unique(<1,3,1,2>)`  $\mapsto$  <1,3,2>

# What is a function?

## Function

is an object that takes an object and returns another object.

## Example

- ▶ `sqrt(2.0)` ↪ 1.414214...
- ▶ `substr("John Smith",6,10)` ↪ "Smith"
- ▶ `sort(<1,3,1,2>)` ↪ <1,1,2,3>
- ▶ `unique(<1,3,1,2>)` ↪ <1,3,2>
- ▶ `paste("John","Smith")` ↪ "John Smith"

# What is a function?

## Function

is an object that takes an object and returns another object.

## Example

- ▶ `sqrt(2.0)` ↪ 1.414214...
- ▶ `substr("John Smith", 6, 10)` ↪ "Smith"
- ▶ `sort(c(1,3,1,2))` ↪ c(1,1,2,3)
- ▶ `unique(c(1,3,1,2))` ↪ c(1,3,2)
- ▶ `paste("John", "Smith")` ↪ "John Smith"
- ▶ `nchar("Smith")` ↪ 5

# What is a function?

## Function

is an object that takes an object and returns another object.

## Example

- ▶ `sqrt(2.0)` ↪ 1.414214...
- ▶ `substr("John Smith",6,10)` ↪ "Smith"
- ▶ `sort(<1,3,1,2>)` ↪ <1,1,2,3>
- ▶ `unique(<1,3,1,2>)` ↪ <1,3,2>
- ▶ `paste("John","Smith")` ↪ "John Smith"
- ▶ `nchar("Smith")` ↪ 5
- ▶ `nchar(substr(paste("John","Smith"),6,10))` ↪ 5

## Variables

A variable is a name with an associated value (an object).

## Example

We define a variable by assigning a value to it

- ▶ `x ← 2`
- ▶ `y ← x + 3`

And we can then use it in other expressions

- ▶ `x*y` ↪ `2*5` ↪ `10`
- ▶ `sqrt(3*x)` ↪ `sqrt(3*2)` ↪ `sqrt(6)` ↪ `2.44949...`

We have to use only variables that have already been defined

- ▶ `x+z` ↪ `error`

# Functions in R

Defining a function on the spot

```
function (vars) expr
```

Example

- ▶ square ← function (x) x^2
- ▶ volume ← function (a,b,c) a\*b\*c

# Functions in R

Defining a function on the spot

```
function (vars) expr
```

Example

- ▶ square ← function (x) x^2
- ▶ volume ← function (a,b,c) a\*b\*c

Function application (calling a function)

Substitute the arguments by supplied values

- ▶ square(3) ↪ 3^2 ↪ 9
- ▶ volume(2,3,5) ↪ 2\*3\*5 ↪ 30
- ▶ (function (x) x+2)(4) ↪ 4+2 ↪ 6

# Functions in R

Defining a function on the spot

```
function (vars) expr
```

Example

- ▶ square ← function (x) x^2
- ▶ volume ← function (a,b,c) a\*b\*c

Function application (calling a function)

Substitute the arguments by supplied values

- ▶ square(3) ↪ 3^2 ↪ 9
- ▶ volume(2,3,5) ↪ 2\*3\*5 ↪ 30
- ▶ (function (x) x+2)(4) ↪ 4+2 ↪ 6

Number of arguments must agree with the definition

- ▶ volume(2,3) ↪ **error**

# Functions as first-class citizens

## Higher-order function

A *higher-order function* (a.k.a *functor*) is a function that takes another function as an argument or returns a function.

# Functions as first-class citizens

## Higher-order function

A *higher-order function* (a.k.a *functor*) is a function that takes another function as an argument or returns a function.

## Example

A function that takes another function as an argument

► `apply ← function (f,⟨x,y,z⟩) ⟨f(x),f(y),f(z)⟩`

## Higher-order function

A *higher-order function* (a.k.a *functor*) is a function that takes another function as an argument or returns a function.

### Example

A function that takes another function as an argument

- ▶ `apply <- function (f,<x,y,z>) <f(x),f(y),f(z)>`
- ▶ `apply(square,<1,3,2>) ↪ <1,9,4>`
- ▶ `apply(function (x) x+1,<1,3,2>) ↪ <2,4,3>`
- ▶ `apply(nchar,<"Hello","Ah","Boom">) ↪ <5,2,4>`

# Functions as first-class citizens

## Example

A function that returns a function

- ▶ `add ← function (x) { function (y) { x + y } }`

# Functions as first-class citizens

## Example

A function that returns a function

- ▶ `add ← function (x) { function (y) { x + y } }`

This function can be used to generate other functions

- ▶ `succ ← add(1) (= function (y) 1 + y)`
- ▶ `pred ← add(-1) (= function (y) -1 + y)`

# Functions as first-class citizens

## Example

A function that returns a function

- ▶ `add ← function (x) { function (y) { x + y } }`

This function can be used to generate other functions

- ▶ `succ ← add(1) (= function (y) 1 + y)`
- ▶ `pred ← add(-1) (= function (y) -1 + y)`

Which can be used independently

- ▶ `succ(2) ↪ 1 + 2 ↪ 3`
- ▶ `pred(3) ↪ -1 + 3 ↪ 2`

# Functions as first-class citizens

## Example

A function that returns a function

- ▶ `add ← function (x) { function (y) { x + y } }`

This function can be used to generate other functions

- ▶ `succ ← add(1) (= function (y) 1 + y)`
- ▶ `pred ← add(-1) (= function (y) -1 + y)`

Which can be used independently

- ▶ `succ(2) ↪ 1 + 2 ↪ 3`
- ▶ `prec(3) ↪ -1 + 3 ↪ 2`

We can also call add as follows

- ▶ `add(2)(3) ↪ (function (y) 2 + y)(3) ↪ 2+3 ↪ 5`

# Functions as first-class citizens

## Example

A function that returns a function

- ▶ `add ← function (x) { function (y) { x + y } }`

This function can be used to generate other functions

- ▶ `succ ← add(1) (= function (y) 1 + y)`
- ▶ `pred ← add(-1) (= function (y) -1 + y)`

Which can be used independently

- ▶ `succ(2) ↪ 1 + 2 ↪ 3`
- ▶ `prec(3) ↪ -1 + 3 ↪ 2`

We can also call add as follows

- ▶ `add(2)(3) ↪ (function (y) 2 + y)(3) ↪ 2+3 ↪ 5`

But not like this

- ▶ `add(2,3) ↪ error`

## Curried functions

Sometimes it is more useful to work with functions that take their arguments one by one rather than functions that take all arguments at once.

## Example

- ▶ `apply ← function (f) function ((x,y,z)) ⟨f(x),f(y),f(z)⟩`
- ▶ `inc_triple ← apply(function (x) x + 1)`
- ▶ `inc_triple(⟨3,1,2⟩) ↪ ⟨4,2,3⟩`
- ▶ `square_triple ← apply(square)`
- ▶ `square_triple(⟨3,1,2⟩) ↪ ⟨9,1,4⟩`

# Currying

There is a function that transforms a function taking a pair to its curried version

```
curry ← function (f) {  
    function (x) {  
        function (y) {  
            f(x,y)  
        }  
    }  
}
```

# Currying

There is a function that transforms a function taking a pair to its curried version

```
curry ← function (f) {  
    function (x) {  
        function (y) {  
            f(x,y)  
        }  
    }  
}
```

## Example

- ▶ plus ← function (x,y) x + y
- ▶ add ← curry(plus)  
(add = function (x) function (y) x + y)

# Uncurrying

The conversion in the other direction is also possible

```
uncurry ← function (f) {  
    function (x,y) {  
        f(x)(y)  
    }  
}
```

# Uncurrying

The conversion in the other direction is also possible

```
uncurry ← function (f) {  
    function (x,y) {  
        f(x)(y)  
    }  
}
```

## Example

- ▶ add ← function (x) function (y) x + y
- ▶ plus ← uncurry(plus)  
(plus = function (x,y) x + y)



## Use case: Map/Reduce

# Use case: Map/Reduce




Université  
de Lille  
**3**  
SCIENCES HUMAINES  
ET SOCIALES

```
f ← function(s) str_count(s,"a")
add ← function(acc,c) acc+c
```

```
l = [abca dest wala rfea uaba dkio atab welk wikd]
```


# Use case: Map/Reduce

```
f ← function(s) str_count(s,"a")
add ← function(acc,c) acc+c
```

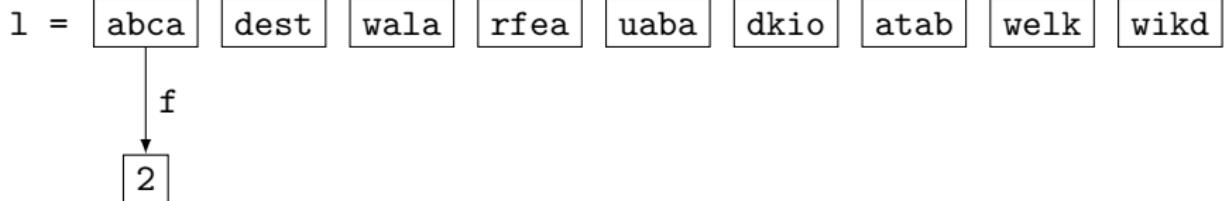


# Use case: Map/Reduce

```
f ← function(s) str_count(s,"a")
add ← function(acc,c) acc+c
```

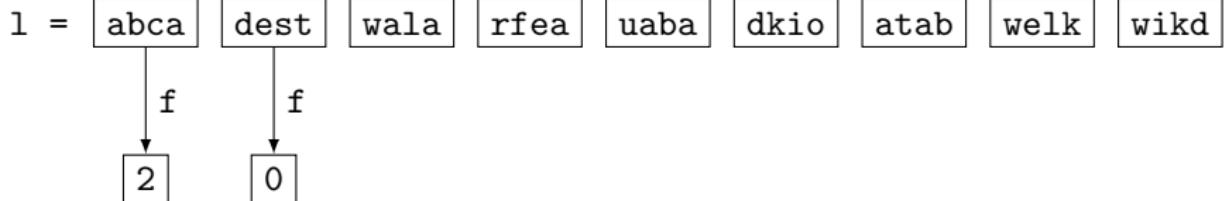


# Use case: Map/Reduce

```
f ← function(s) str_count(s,"a")
add ← function(acc,c) acc+c
```

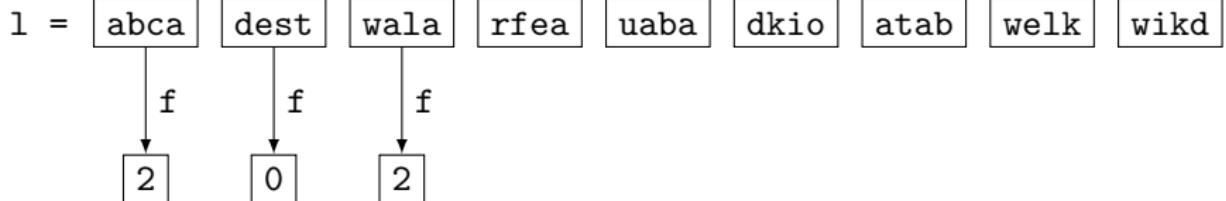


# Use case: Map/Reduce

```
f ← function(s) str_count(s,"a")
add ← function(acc,c) acc+c
```

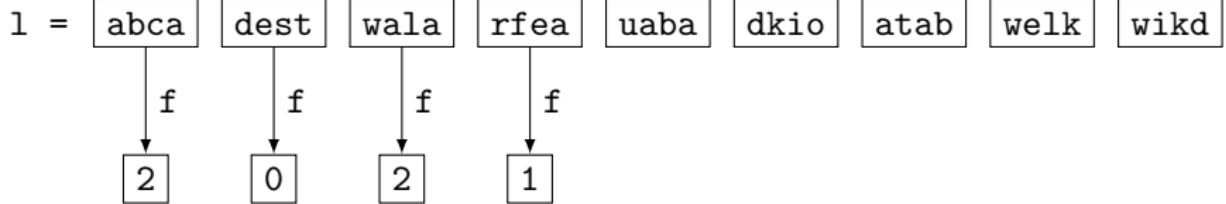


# Use case: Map/Reduce

```
f ← function(s) str_count(s,"a")
add ← function(acc,c) acc+c
```

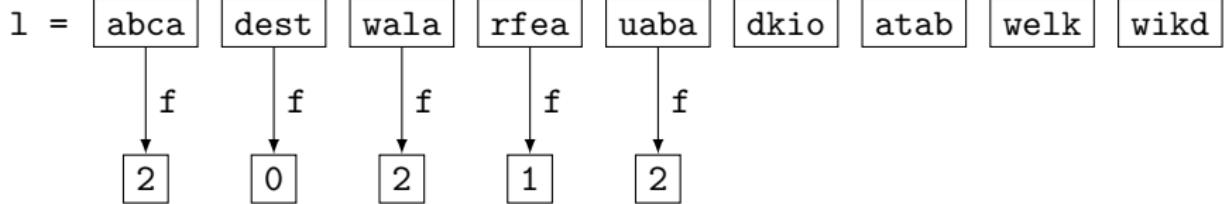

# Use case: Map/Reduce


```
f ← function(s) str_count(s,"a")
add ← function(acc,c) acc+c
```

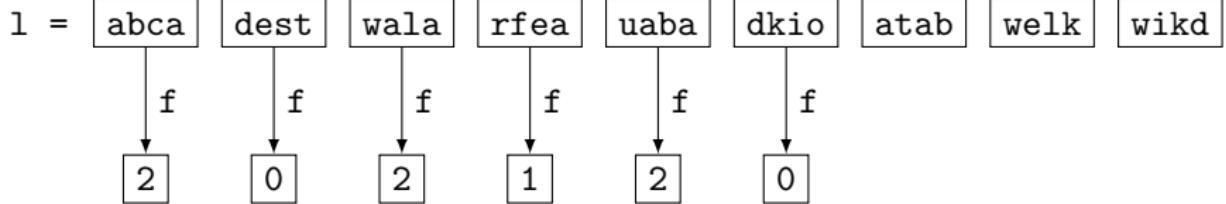

# Use case: Map/Reduce




```
f ← function(s) str_count(s,"a")
add ← function(acc,c) acc+c
```

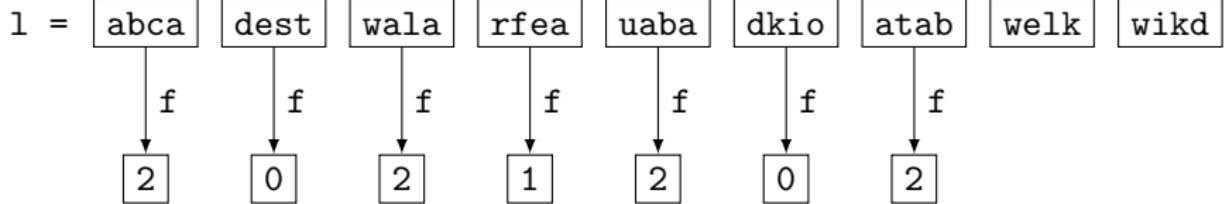

# Use case: Map/Reduce


```
f ← function(s) str_count(s,"a")
add ← function(acc,c) acc+c
```

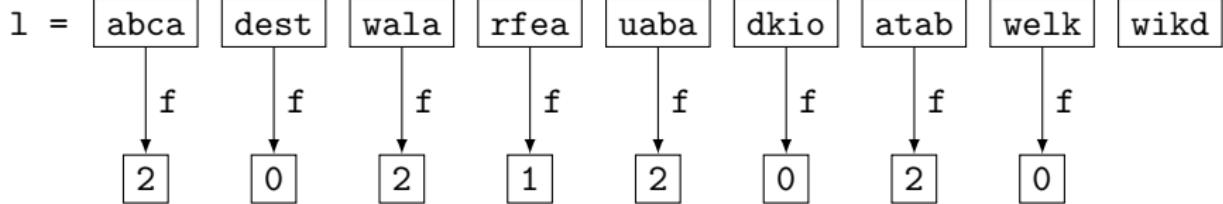

# Use case: Map/Reduce

```
f ← function(s) str_count(s,"a")
add ← function(acc,c) acc+c
```


Map

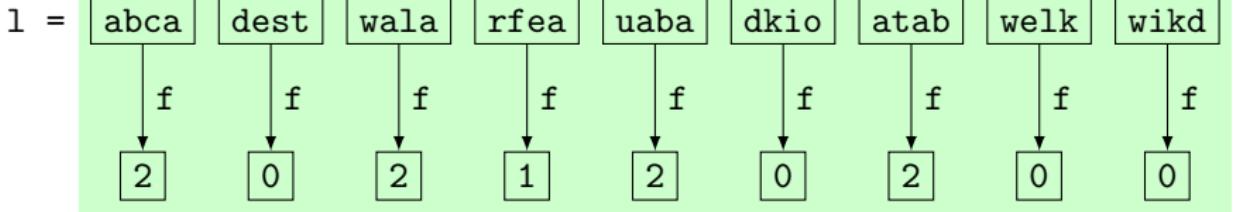

# Use case: Map/Reduce

```
f ← function(s) str_count(s,"a")
add ← function(acc,c) acc+c
```


Map

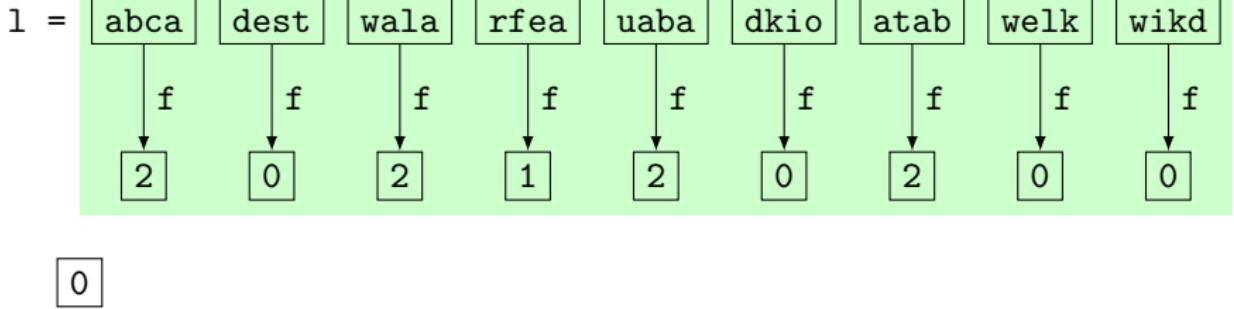

# Use case: Map/Reduce

```
f ← function(s) str_count(s,"a")
add ← function(acc,c) acc+c
```


Map

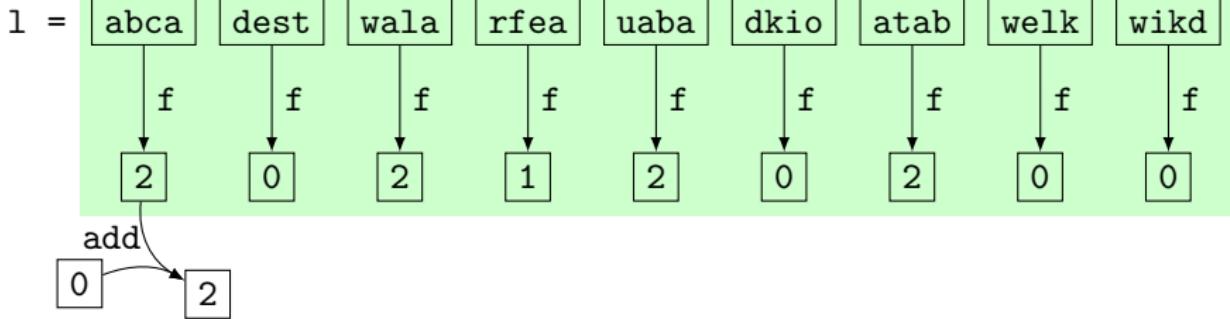

# Use case: Map/Reduce

```
f ← function(s) str_count(s,"a")
add ← function(acc,c) acc+c
```


Map

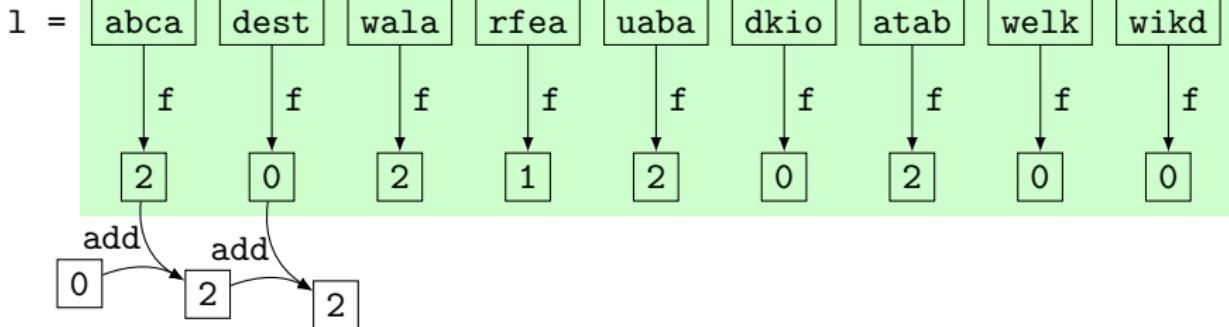

# Use case: Map/Reduce

```
f ← function(s) str_count(s,"a")
add ← function(acc,c) acc+c
```


Map

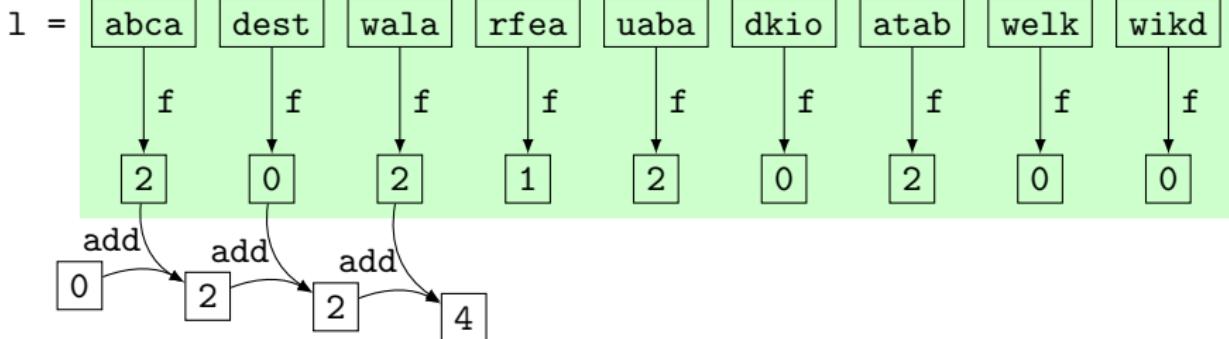

# Use case: Map/Reduce

```
f ← function(s) str_count(s,"a")
add ← function(acc,c) acc+c
```


Map

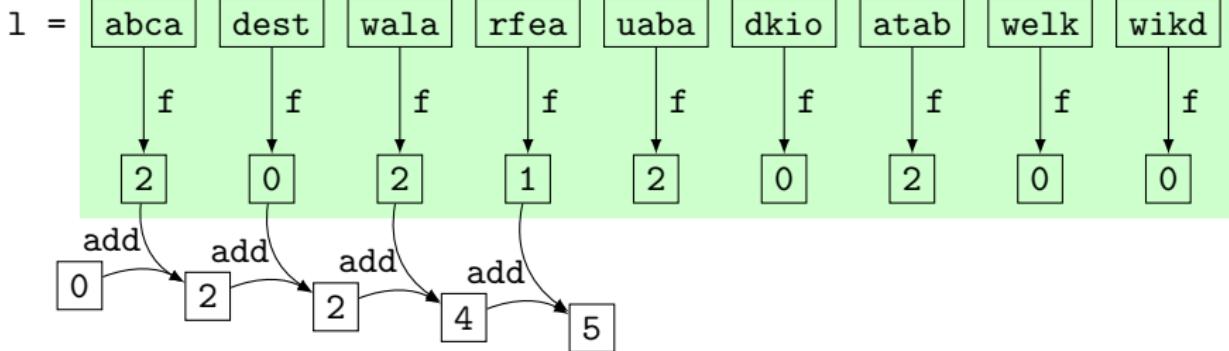

# Use case: Map/Reduce

```
f ← function(s) str_count(s,"a")
add ← function(acc,c) acc+c
```


Map

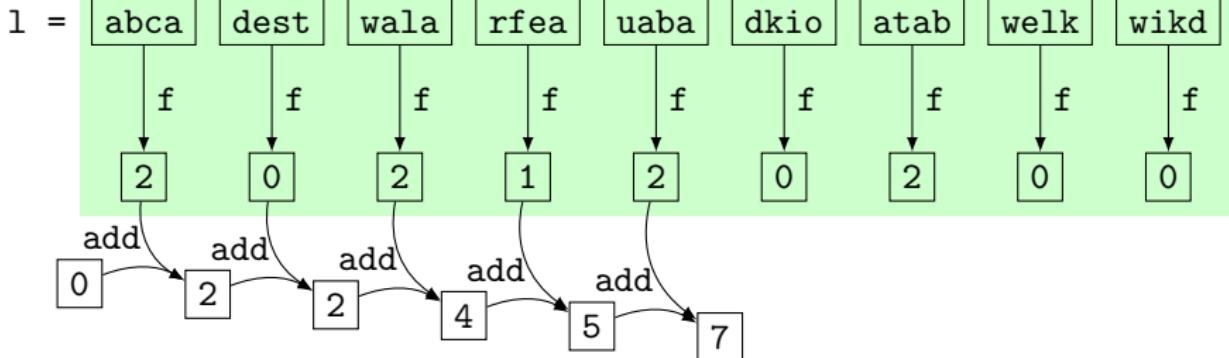

# Use case: Map/Reduce


```
f ← function(s) str_count(s,"a")
add ← function(acc,c) acc+c
```

Map

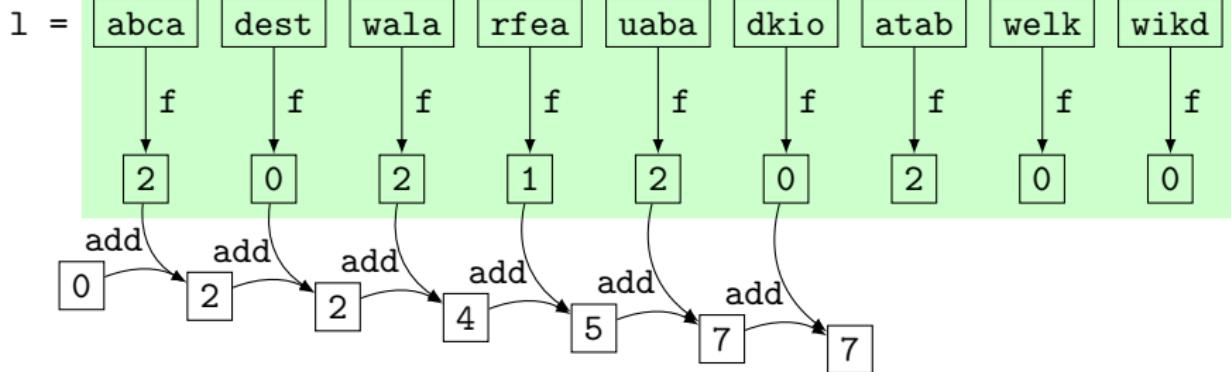


# Use case: Map/Reduce

```
f ← function(s) str_count(s,"a")
add ← function(acc,c) acc+c
```

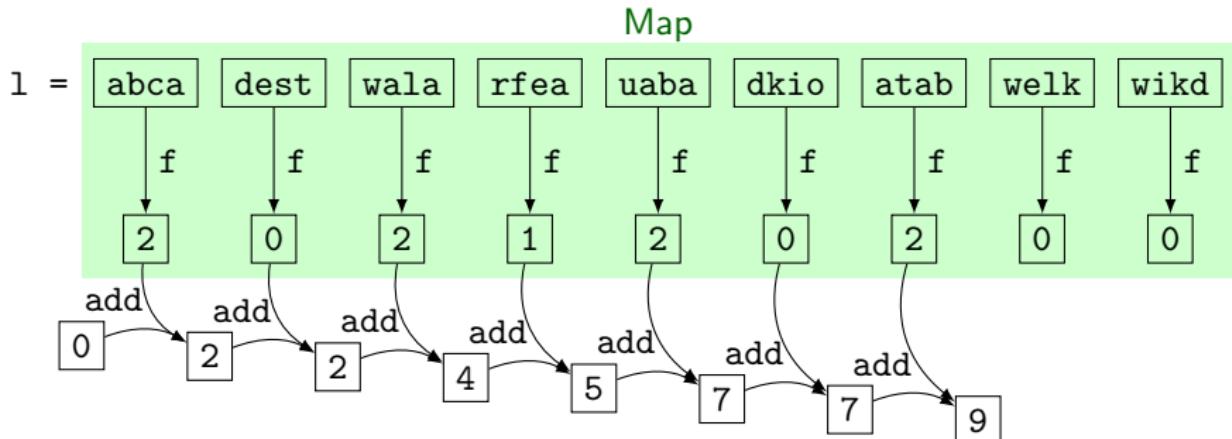


# Use case: Map/Reduce

```
f ← function(s) str_count(s,"a")
add ← function(acc,c) acc+c
```

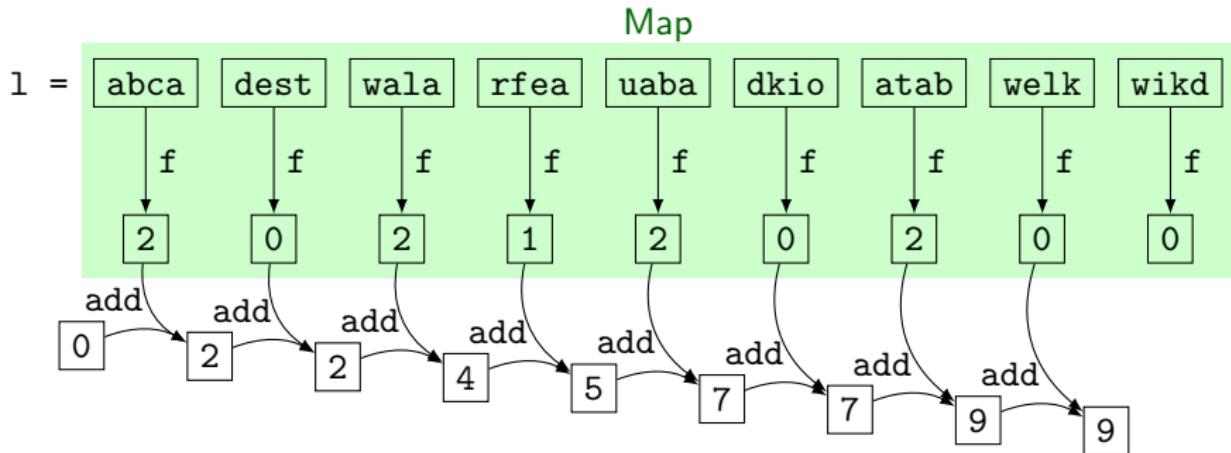


# Use case: Map/Reduce

```
f ← function(s) str_count(s,"a")
add ← function(acc,c) acc+c
```

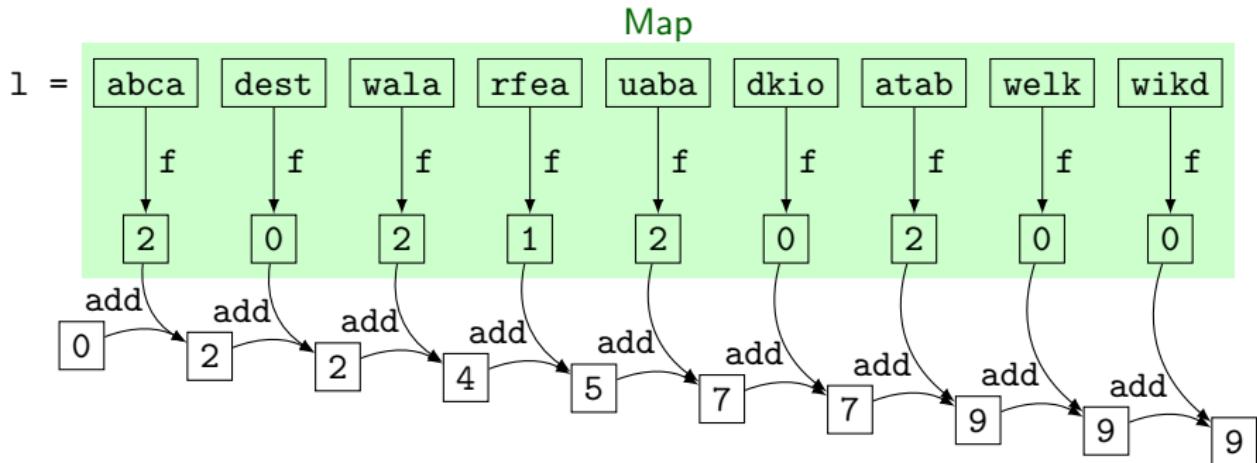

# Use case: Map/Reduce


```
f ← function(s) str_count(s,"a")
add ← function(acc,c) acc+c
```

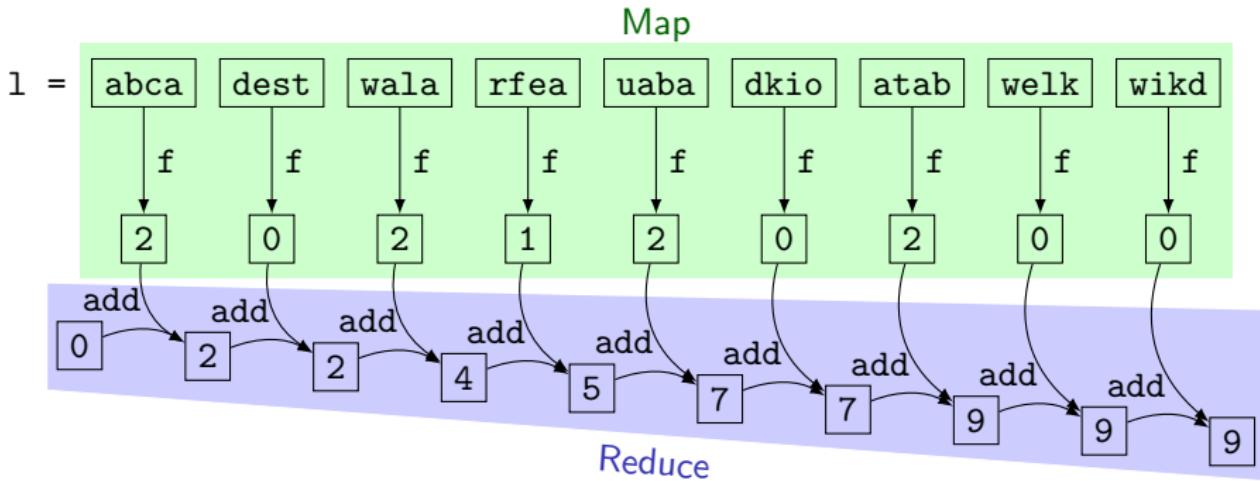

```
reduce(map(l,f),add,0)
```

# Use case: Map/Reduce

```
f ← function(s) str_count(s,"a")
add ← function(acc,c) acc+c
```

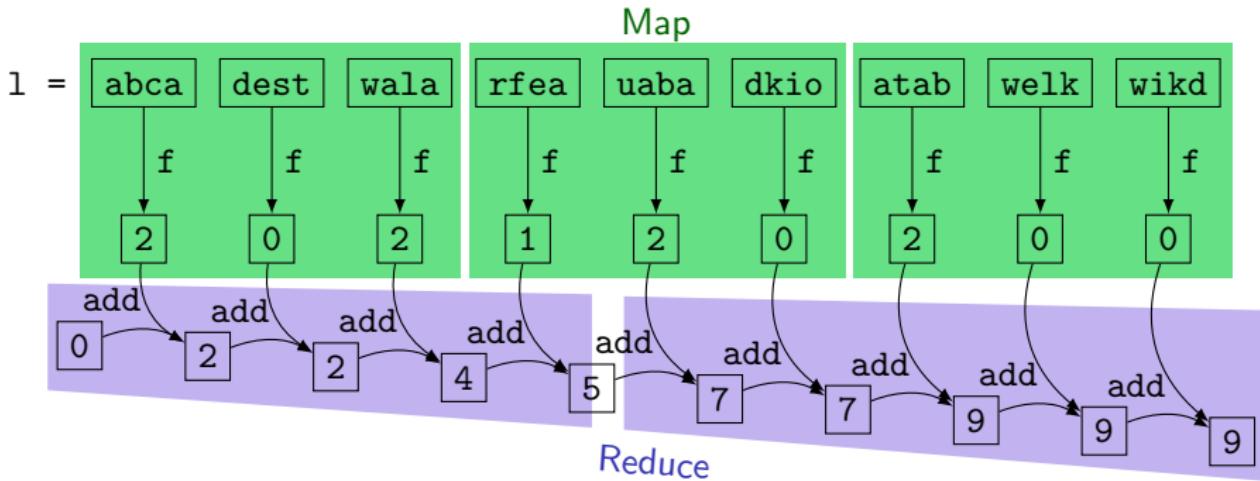



# Type systems

Type system associates with every object a property called type.

## Example

2.5 is a number, "abc" is a string (of characters), exp is a function that takes a number and returns a number.

## Type errors

Errors caused by the discrepancy between the types of data as opposed to the types expected by a function (logic errors).

## Example

`exp(2.5)` is error-free while `exp("abc")` has a type error because it uses a string where a number is expected.

## Function type

Elementary knowledge of what the function does

# R is dynamically but not statically typed

## Static typing

- ▶ every object (including functions) has a type
- ▶ types might be inferred or may need to be declared
- ▶ type enforcement at compile time guarantees an error-free execution (strong type safety)
- ▶ type conversions often need to be explicit

## Dynamic typing

- ▶ types of functions is not check at compile time so there is no need to declare them
- ▶ run time errors are raised if a function is called with the wrong type of an argument
- ▶ correctness of code is verified using test cases (unit testing)
- ▶ type conversions may implicit

# Functions and types

## Function type

1. what kind of objects a function takes
2. what kind of object it produces

# Functions and types



Université  
de Lille  
3 SCIENCES HUMAINES  
ET SOCIALES

## Function type

1. what kind of objects a function takes
2. what kind of object it produces

## Example

- ▶ `sqrt(2.0)`  $\mapsto$  1.414214...
- ▶ `substr("abcdef",2,4)`  $\mapsto$  "bcd"
- ▶ `unique(<1,3,1,2>)`  $\mapsto$  <1,3,2>
- ▶ `substr` takes a string and two integers and returns a string
- ▶ `sqrt` takes a real number and returns a real number
- ▶ `unique` takes a list of numbers and return a list of numbers

## Atomic types

`log` logical – two Boolean values FALSE and TRUE

`num` numeric – floating-point numeric values, 0.1,  $\sqrt{2}$ ,  $\pi$ ;  
(the default computational data type, in double precision)

`int` integer – positive and negative integers 0, 1, 2, ..., -1, -2, ...  
In R we need to use L prefix to force it e.g., `-30L`.

`chr` character – characters and strings

`raw` raw – binary objects of arbitrary size

# ML-like type system for R

## Structural types

tuples a sequence of elements of various types

- ▶  $\text{chr} \times \text{int} \times \text{int}$  – triples of one string and two integers
- ▶  $\text{complex} = \text{num} \times \text{num}$  – complex numbers, where  $\pi + \sqrt{2}i$  is represented as  $\langle \pi, \sqrt{2} \rangle$ .

vectors collections of the same type of a arbitrary length

- ▶  $\text{int}^*$  – vectors of integers
- ▶  $\text{chr}^*$  – vectors of strings

# ML-like type system for R

## Structural types

tuples a sequence of elements of various types

- ▶  $\text{chr} \times \text{int} \times \text{int}$  – triples of one string and two integers
- ▶  $\text{complex} = \text{num} \times \text{num}$  – complex numbers, where  $\pi + \sqrt{2}i$  is represented as  $\langle \pi, \sqrt{2} \rangle$ .

vectors collections of the same type of arbitrary length

- ▶  $\text{int}^*$  – vectors of integers
- ▶  $\text{chr}^*$  – vectors of strings

## Tuples as fixed-size vectors

$\text{int}^3 = \text{int} \times \text{int} \times \text{int}$  is the type of

- ▶ triples of integers
- ▶ integer vectors of length 3

In general,

$$\text{int}^* = \text{int}^0 \cup \text{int}^1 \cup \text{int}^2 \cup \text{int}^3 \cup \dots$$

# ML-like type system for R

Function  $f$  has type  $T \rightarrow S$  if

it takes an object of type  $T$  and returns an object of type  $S$

# ML-like type system for R

Function  $f$  has type  $T \rightarrow S$  if

it takes an object of type  $T$  and returns an object of type  $S$

## Example

- ▶ `sqrt(2.0)`  $\mapsto$  1.414214...
- ▶ `substr("abcdef",2,4)`  $\mapsto$  "bcd"
- ▶ `unique(c(1,3,1,2))`  $\mapsto$  c(1,3,2)
- ▶ `sqrt` : num  $\rightarrow$  num
- ▶ `substr` : chr  $\times$  int  $\times$  int  $\rightarrow$  chr
- ▶ `unique` : num\*  $\rightarrow$  num\*

# ML-like type system for R

Function  $f$  has type  $T \rightarrow S$  if

it takes an object of type  $T$  and returns an object of type  $S$

## Example

- ▶ `sqrt(2.0)`  $\mapsto 1.414214\dots$
- ▶ `substr("abcdef",2,4)`  $\mapsto "bcd"$
- ▶ `unique(c(1,3,1,2))`  $\mapsto c(1,3,2)$
- ▶ `sqrt` : num  $\rightarrow$  num
- ▶ `substr` : chr  $\times$  int  $\times$  int  $\rightarrow$  chr
- ▶ `unique` : num\*  $\rightarrow$  num\*

→ is right-associative (grouped from the right)

$X \rightarrow Y \rightarrow Z$  is  $X \rightarrow (Y \rightarrow Z)$  and **not**  $(X \rightarrow Y) \rightarrow Z$

# ML-like type system for R

## Example

### Some functions

- ▶ `sum(c(3,2,5,7,2,5,8))` ↪ 32
- ▶ `2.1 + 3.2` ↪ 5.3
- ▶ `floor(2.8)` ↪ 2
- ▶ `paste("John","Smith")` ↪ "John Smith"
- ▶ `nchar("John")` ↪ 4

# ML-like type system for R

## Example

Some functions

- ▶ `sum(c(3,2,5,7,2,5,8))` ↪ 32
- ▶ `2.1 + 3.2` ↪ 5.3
- ▶ `floor(2.8)` ↪ 2
- ▶ `paste("John","Smith")` ↪ "John Smith"
- ▶ `nchar("John")` ↪ 4

and their types

- ▶ `sum` : `num*` → `num`

# ML-like type system for R

## Example

Some functions

- ▶ `sum(c(3,2,5,7,2,5,8))` ↪ 32
- ▶ `2.1 + 3.2` ↪ 5.3
- ▶ `floor(2.8)` ↪ 2
- ▶ `paste("John","Smith")` ↪ "John Smith"
- ▶ `nchar("John")` ↪ 4

and their types

- ▶ `sum` : `num*` → `num`
- ▶ `'+'` : `num × num` → `num`

# ML-like type system for R

## Example

Some functions

- ▶ `sum(c(3,2,5,7,2,5,8))` ↪ 32
- ▶ `2.1 + 3.2` ↪ 5.3
- ▶ `floor(2.8)` ↪ 2
- ▶ `paste("John","Smith")` ↪ "John Smith"
- ▶ `nchar("John")` ↪ 4

and their types

- ▶ `sum` : `num*` → `num`
- ▶ `'+'` : `num × num` → `num`
- ▶ `floor` : `num` → `int`

# ML-like type system for R

## Example

Some functions

- ▶ `sum(c(3,2,5,7,2,5,8))` ↪ 32
- ▶ `2.1 + 3.2` ↪ 5.3
- ▶ `floor(2.8)` ↪ 2
- ▶ `paste("John","Smith")` ↪ "John Smith"
- ▶ `nchar("John")` ↪ 4

and their types

- ▶ `sum : num* → num`
- ▶ `'+' : num × num → num`
- ▶ `floor : num → int`
- ▶ `paste : chr × chr → chr`

# ML-like type system for R

## Example

Some functions

- ▶ `sum(c(3,2,5,7,2,5,8))` ↪ 32
- ▶ `2.1 + 3.2` ↪ 5.3
- ▶ `floor(2.8)` ↪ 2
- ▶ `paste("John","Smith")` ↪ "John Smith"
- ▶ `nchar("John")` ↪ 4

and their types

- ▶ `sum` : `num*` → `num`
- ▶ `'+'` : `num × num` → `num`
- ▶ `floor` : `num` → `int`
- ▶ `paste` : `chr × chr` → `chr`
- ▶ `nchar` : `chr` → `num`

# ML-like type system for R

## Identity function

► `id ← function (x) x`

It takes an object and returns an object of precisely the same type

## Identity function

- ▶ `id ← function (x) x`

It takes an object and returns an object of precisely the same type

## Polymorphic types $\mathcal{X}, \mathcal{Y}, \mathcal{Z}, \dots$

If nothing is known about a type, we can use polymorphic types to constraint the types

$$\text{id} : \mathcal{X} \rightarrow \mathcal{X}$$

While we do not know anything about the type  $\mathcal{X}$ , we know that `id` returns an object of precisely the same type it takes as an argument:

- ▶ `id(1.0) ↪ 1.0`
- ▶ `id("abc") ↪ "abc"`

# ML-like type system for R

A function that reverses a vector

- ▶ `rev(<1,2,3>)`  $\mapsto \langle 3, 2, 1 \rangle$
- ▶ `rev(<"a","b","c","d">)`  $\mapsto \langle "d", "c", "b", "a" \rangle$

A function that returns the first element of a vector

- ▶ `head(<1,2,3>)`  $\mapsto 1$
- ▶ `head(<"a","b","c","d">)`  $\mapsto "a"$

A function that measures the length of a vector

- ▶ `length(<1,2,3>)`  $\mapsto 3$
- ▶ `length(<"a","b","c","d">)`  $\mapsto 4$

Their types are:

# ML-like type system for R

A function that reverses a vector

- ▶ `rev(<1,2,3>)`  $\mapsto \langle 3, 2, 1 \rangle$
- ▶ `rev(<"a","b","c","d">)`  $\mapsto \langle "d", "c", "b", "a" \rangle$

A function that returns the first element of a vector

- ▶ `head(<1,2,3>)`  $\mapsto 1$
- ▶ `head(<"a","b","c","d">)`  $\mapsto "a"$

A function that measures the length of a vector

- ▶ `length(<1,2,3>)`  $\mapsto 3$
- ▶ `length(<"a","b","c","d">)`  $\mapsto 4$

Their types are:

- ▶ `rev : X* → X*`

# ML-like type system for R

A function that reverses a vector

- ▶ `rev(<1,2,3>)`  $\mapsto \langle 3,2,1 \rangle$
- ▶ `rev(<"a","b","c","d">)`  $\mapsto \langle "d", "c", "b", "a" \rangle$

A function that returns the first element of a vector

- ▶ `head(<1,2,3>)`  $\mapsto 1$
- ▶ `head(<"a","b","c","d">)`  $\mapsto "a"$

A function that measures the length of a vector

- ▶ `length(<1,2,3>)`  $\mapsto 3$
- ▶ `length(<"a","b","c","d">)`  $\mapsto 4$

Their types are:

- ▶ `rev :  $\mathcal{X}^*$   $\rightarrow \mathcal{X}^*$`
- ▶ `head :  $\mathcal{X}^*$   $\rightarrow \mathcal{X}$`

# ML-like type system for R

A function that reverses a vector

- ▶ `rev(<1,2,3>)`  $\mapsto \langle 3,2,1 \rangle$
- ▶ `rev(<"a","b","c","d">)`  $\mapsto \langle "d", "c", "b", "a" \rangle$

A function that returns the first element of a vector

- ▶ `head(<1,2,3>)`  $\mapsto 1$
- ▶ `head(<"a","b","c","d">)`  $\mapsto "a"$

A function that measures the length of a vector

- ▶ `length(<1,2,3>)`  $\mapsto 3$
- ▶ `length(<"a","b","c","d">)`  $\mapsto 4$

Their types are:

- ▶ `rev :  $\mathcal{X}^*$   $\rightarrow \mathcal{X}^*$`
- ▶ `head :  $\mathcal{X}^*$   $\rightarrow \mathcal{X}$`
- ▶ `length :  $\mathcal{X}^*$   $\rightarrow \text{int}$`

# How to type functions?

# Typing functions from definition

Given the following type assertions

- ▶ `sum : num* → num`
- ▶ `head : X* → X`
- ▶ `paste : chr × chr → chr`
- ▶ `'+' : num × num → num`

find the type of the functions defined as follows

- ▶ `shout ← function (x) paste(x, "!")`
- ▶ `f ← function (x,y) x + sum(y)`
- ▶ `g ← function (x,y) paste(head(x), y)`

# Typing functions from definition

Given the following type assertions

- ▶ `sum : num* → num`
- ▶ `head : X* → X`
- ▶ `paste : chr × chr → chr`
- ▶ `'+' : num × num → num`

find the type of the functions defined as follows

- ▶ `shout ← function (x) paste(x, "!")`
- ▶ `f ← function (x,y) x + sum(y)`
- ▶ `g ← function (x,y) paste(head(x), y)`

The function types are

# Typing functions from definition

Given the following type assertions

- ▶ `sum : num* → num`
- ▶ `head : X* → X`
- ▶ `paste : chr × chr → chr`
- ▶ `'+' : num × num → num`

find the type of the functions defined as follows

- ▶ `shout ← function (x) paste(x, "!"")`
- ▶ `f ← function (x,y) x + sum(y)`
- ▶ `g ← function (x,y) paste(head(x), y)`

The function types are

- ▶ `shout : chr → chr`

# Typing functions from definition

Given the following type assertions

- ▶ `sum : num* → num`
- ▶ `head : X* → X`
- ▶ `paste : chr × chr → chr`
- ▶ `'+' : num × num → num`

find the type of the functions defined as follows

- ▶ `shout ← function (x) paste(x, "!"")`
- ▶ `f ← function (x,y) x + sum(y)`
- ▶ `g ← function (x,y) paste(head(x), y)`

The function types are

- ▶ `shout : chr → chr`
- ▶ `f : num × num* → num`

# Typing functions from definition

Given the following type assertions

- ▶ `sum : num* → num`
- ▶ `head : X* → X`
- ▶ `paste : chr × chr → chr`
- ▶ `'+' : num × num → num`

find the type of the functions defined as follows

- ▶ `shout ← function (x) paste(x, "!"")`
- ▶ `f ← function (x,y) x + sum(y)`
- ▶ `g ← function (x,y) paste(head(x), y)`

The function types are

- ▶ `shout : chr → chr`
- ▶ `f : num × num* → num`
- ▶ `g : chr* × chr → chr`

# Typing higher-order functions

Given the following type assertions

- ▶  $\text{sum} : \text{num}^* \rightarrow \text{num}$
- ▶  $\text{length} : \mathcal{X}^* \rightarrow \text{int}$
- ▶  $'/' : \text{num} \times \text{num} \rightarrow \text{num}$
- ▶  $\text{nchar} : \text{chr} \rightarrow \text{int}$

infer the type of the functions

- ▶  $F \leftarrow \text{function } (f, x) \text{ sum}(x)/f(x)$
- ▶  $G \leftarrow \text{function } (g, x) \text{ sum}(g(\text{len}(x)))$
- ▶  $H \leftarrow \text{function } (h, x) \text{ h(nchar}(x))/2$

# Typing higher-order functions

Given the following type assertions

- ▶  $\text{sum} : \text{num}^* \rightarrow \text{num}$
- ▶  $\text{length} : \mathcal{X}^* \rightarrow \text{int}$
- ▶  $'/' : \text{num} \times \text{num} \rightarrow \text{num}$
- ▶  $\text{nchar} : \text{chr} \rightarrow \text{int}$

infer the type of the functions

- ▶  $F \leftarrow \text{function } (f, x) \text{ sum}(x)/f(x)$
- ▶  $G \leftarrow \text{function } (g, x) \text{ sum}(g(\text{len}(x)))$
- ▶  $H \leftarrow \text{function } (h, x) \text{ h}(\text{nchar}(x))/2$

The function types are

# Typing higher-order functions

Given the following type assertions

- ▶  $\text{sum} : \text{num}^* \rightarrow \text{num}$
- ▶  $\text{length} : \mathcal{X}^* \rightarrow \text{int}$
- ▶  $'/' : \text{num} \times \text{num} \rightarrow \text{num}$
- ▶  $\text{nchar} : \text{chr} \rightarrow \text{int}$

infer the type of the functions

- ▶  $F \leftarrow \text{function } (f, x) \text{ sum}(x)/f(x)$
- ▶  $G \leftarrow \text{function } (g, x) \text{ sum}(g(\text{len}(x)))$
- ▶  $H \leftarrow \text{function } (h, x) \text{ h}(\text{nchar}(x))/2$

The function types are

- ▶  $F : (\text{num}^* \rightarrow \text{num}) \times \text{num}^* \rightarrow \text{num}$

# Typing higher-order functions

Given the following type assertions

- ▶  $\text{sum} : \text{num}^* \rightarrow \text{num}$
- ▶  $\text{length} : \mathcal{X}^* \rightarrow \text{int}$
- ▶  $'/' : \text{num} \times \text{num} \rightarrow \text{num}$
- ▶  $\text{nchar} : \text{chr} \rightarrow \text{int}$

infer the type of the functions

- ▶  $F \leftarrow \text{function } (f, x) \text{ sum}(x)/f(x)$
- ▶  $G \leftarrow \text{function } (g, x) \text{ sum}(g(\text{len}(x)))$
- ▶  $H \leftarrow \text{function } (h, x) \text{ h}(\text{nchar}(x))/2$

The function types are

- ▶  $F : (\text{num}^* \rightarrow \text{num}) \times \text{num}^* \rightarrow \text{num}$
- ▶  $G : (\text{num} \rightarrow \text{num}^*) \times \text{num}^* \rightarrow \text{num}$

# Typing higher-order functions

Given the following type assertions

- ▶  $\text{sum} : \text{num}^* \rightarrow \text{num}$
- ▶  $\text{length} : \mathcal{X}^* \rightarrow \text{int}$
- ▶  $'/' : \text{num} \times \text{num} \rightarrow \text{num}$
- ▶  $\text{nchar} : \text{chr} \rightarrow \text{int}$

infer the type of the functions

- ▶  $F \leftarrow \text{function } (f, x) \text{ sum}(x)/f(x)$
- ▶  $G \leftarrow \text{function } (g, x) \text{ sum}(g(\text{len}(x)))$
- ▶  $H \leftarrow \text{function } (h, x) \text{ h}(\text{nchar}(x))/2$

The function types are

- ▶  $F : (\text{num}^* \rightarrow \text{num}) \times \text{num}^* \rightarrow \text{num}$
- ▶  $G : (\text{num} \rightarrow \text{num}^*) \times \text{num}^* \rightarrow \text{num}$
- ▶  $H : (\text{int} \rightarrow \text{num}) \times \text{chr} \rightarrow \text{num}$

# Typing higher-order functions (contd.)

## Example

```
power ← function (y) function (x) x^y
square ← power(2)
cube ← power(3)
square(2) ↪
cube(2) ↪
```

What is the type of power?

# Typing higher-order functions (contd.)

## Example

```
power ← function (y) function (x) x^y
square ← power(2)
cube ← power(3)
square(2) ↪ 4
cube(2) ↪ 8
```

What is the type of power?

```
square : num → num
cube : num → num
```

# Typing higher-order functions (contd.)

## Example

```
power ← function (y) function (x) x^y
square ← power(2)
cube ← power(3)
square(2) ↪ 4
cube(2) ↪ 8
```

What is the type of power?

```
square : num → num
cube : num → num
power : num → num → num
```

# Typing higher-order functions (contd.)

## Typing curried apply function

- ▶ `apply ← function (f) function ⟨⟨x,y,z⟩⟩ ⟨f(x),f(y),f(z)⟩`
- ▶ `square_triple ← apply(square)`
- ▶ `square_triple(⟨3,1,2⟩) ↪ ⟨9,1,4⟩`
- ▶ `nchar_triple ← apply(nchar)`
- ▶ `nchar_triple(⟨"Hello","Ah","Boom"⟩) ↪ ⟨5,2,4⟩`

The types are

- ▶ `square : num → num`
- ▶ `nchar : chr → int`

# Typing higher-order functions (contd.)

## Typing curried apply function

- ▶ `apply ← function (f) function ⟨⟨x,y,z⟩⟩ ⟨f(x),f(y),f(z)⟩`
- ▶ `square_triple ← apply(square)`
- ▶ `square_triple(⟨3,1,2⟩) ↪ ⟨9,1,4⟩`
- ▶ `nchar_triple ← apply(nchar)`
- ▶ `nchar_triple(⟨"Hello", "Ah", "Boom"⟩) ↪ ⟨5,2,4⟩`

The types are

- ▶ `square : num → num`
- ▶ `nchar : chr → int`
- ▶ `square_triple : num3 → num3`

# Typing higher-order functions (contd.)

## Typing curried apply function

- ▶ `apply ← function (f) function ⟨⟨x,y,z⟩⟩ ⟨f(x),f(y),f(z)⟩`
- ▶ `square_triple ← apply(square)`
- ▶ `square_triple(⟨3,1,2⟩) ↪ ⟨9,1,4⟩`
- ▶ `nchar_triple ← apply(nchar)`
- ▶ `nchar_triple(⟨"Hello","Ah","Boom"⟩) ↪ ⟨5,2,4⟩`

The types are

- ▶ `square : num → num`
- ▶ `nchar : chr → int`
- ▶ `square_triple : num3 → num3`
- ▶ `nchar_triple : chr3 → int3`

# Typing higher-order functions (contd.)



Université  
de Lille  
3  
SCIENCES HUMAINES  
ET SOCIALES

## Typing curried apply function

- ▶ `apply ← function (f) function ⟨⟨x,y,z⟩⟩ ⟨f(x),f(y),f(z)⟩`
- ▶ `square_triple ← apply(square)`
- ▶ `square_triple⟨⟨3,1,2⟩⟩ ↪ ⟨9,1,4⟩`
- ▶ `nchar_triple ← apply(nchar)`
- ▶ `nchar_triple⟨⟨"Hello","Ah","Boom"⟩⟩ ↪ ⟨5,2,4⟩`

The types are

- ▶ `square : num → num`
- ▶ `nchar : chr → int`
- ▶ `square_triple : num3 → num3`
- ▶ `nchar_triple : chr3 → int3`
- ▶ `apply : (X → Y) → X3 → Y3`

# Typing higher-order functions (contd.)

Recall the apply function

- ▶ `apply <- function (f,⟨x,y,z⟩) ⟨f(x),f(y),f(z)⟩`
- ▶ `apply(id,⟨3,2,5⟩) ↠ ⟨3,2,5⟩`
- ▶ `apply(square,⟨3,2,5⟩) ↠ ⟨4,9⟩`
- ▶ `shout <- function (s) paste(s,"!")`
- ▶ `apply(shout,⟨"a","b","c"⟩) ↠ ⟨"a !","b !","c !"⟩`
- ▶ `apply(nchar,⟨"Hello","Ah","Boom"⟩) ↠ ⟨5,2,4⟩`

# Typing higher-order functions (contd.)

Recall the apply function

- ▶ `apply ← function (f,<x,y,z>) <f(x),f(y),f(z)>`
- ▶ `apply(id,<3,2,5>) ↠ <3,2,5>`
- ▶ `apply(square,<3,2,5>) ↠ <4,9>`
- ▶ `shout ← function (s) paste(s,"!")`
- ▶ `apply(shout,<"a","b","c">) ↠ <"a !","b !","c !">`
- ▶ `apply(nchar,<"Hello","Ah","Boom">) ↠ <5,2,4>`

Its type is

- ▶  $\text{apply} : (\mathcal{X} \rightarrow \mathcal{Y}) \times \mathcal{X}^3 \rightarrow \mathcal{Y}^3$

# Typing higher-order functions (contd.)

What is the type of the curry function

```
curry ← function (f) {  
    function (x) {  
        function (y) {  
            f(x,y)  
        }  
    }  
}
```

# Typing higher-order functions (contd.)

What is the type of the curry function

```
curry ← function (f) {  
    function (x) {  
        function (y) {  
            f(x,y)  
        }  
    }  
}
```

$$\text{curry} : (\mathcal{X} \times \mathcal{Y} \rightarrow \mathcal{Z}) \rightarrow \mathcal{X} \rightarrow \mathcal{Y} \rightarrow \mathcal{Z}$$

# Typing higher-order functions (contd.)

And the `uncurry` function

```
uncurry ← function (f) {  
    function (x,y) {  
        f(x)(y)  
    }  
}
```

# Typing higher-order functions (contd.)

And the `uncurry` function

```
uncurry ← function (f) {  
    function (x,y) {  
        f(x)(y)  
    }  
}
```

$$\text{uncurry} : (\mathcal{X} \rightarrow \mathcal{Y} \rightarrow \mathcal{Z}) \rightarrow \mathcal{X} \times \mathcal{Y} \rightarrow \mathcal{Z}$$

# Types in Map/Reduce



Université  
de Lille  
3  
SCIENCES HUMAINES  
ET SOCIALES

## General schema

$$\text{reduce}(\text{map}(\langle x_1, \dots, x_n \rangle, f), \text{add}, 0)$$

$$\text{reduce}(\langle f(x_1), \dots, f(x_n) \rangle, \text{add}, 0)$$

$$\text{add}(\dots \text{add}(\text{add}(0, f(x_1)), f(x_2)), \dots, f(x_n))$$

## Types are

- ▶  $\text{map} : \mathcal{X}^* \times (\mathcal{X} \rightarrow \mathcal{Y}) \rightarrow \mathcal{Y}^*$
- ▶  $\text{reduce} : \mathcal{Y}^* \times (\mathcal{Z} \times \mathcal{Y} \rightarrow \mathcal{Z}) \times \mathcal{Z} \rightarrow \mathcal{Z}$